

TEST REPORT

NO.: A001T100710003001

Date: Jul 13, 2010

Page 1 of 3

Customer: Cheung Kee Canvas Ltd.**Address:** G/F.,352,Reclamation ST.,Kln.,H.K.**Report on the submitted sample said to be****Sample name:** PVC TARPAULIN**Model:** CK2008 / High-strength yarn 0.55mm*2.10m**Item/Lot No. :** CK2008 / High-strength yarn**Material:** /**Buyer:** PVC**Supplier:** /**Manufacturer:** /**Country of Origin:** /**Country of Destination:** /**Labelled Age Grading:****Sample received date:** Jul 10, 2010**Testing period:** From Jul 10, 2010 to Jul 13, 2010**Testing Requested**

For compliance with the European Standard on Safety of Toys:

-EN 71-2:2006+A1:2007- Flammability

Conclusion

-EN 71-2: The submitted sample complied with the requirement.

*****FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGE(S)*****

Written by: JoyceTested by: AndyInspected by: JamesApproved by: Jeenah

TEST REPORT

NO.: A001T100710003001

Date: Jul 13, 2010

Page 2 of 3

Results:

Part 2: Flammability

Section	Description	Result
4	REQUIREMENTS	
4.1	General	Pass
4.3	Toys disguise costumes and other toys intended to be worn by a child in play	Pass

Note:

4.1 The following materials shall not be used in the manufacture of toys:

- Celluloid (cellulose nitrate), except when used in varnish, paint or glue, or in balls of the type used for table tennis or similar games, and materials with the same behaviour in fire as celluloid. Specific materials to which the test flame is applied in order to check compliance of the toy with requirements in 4.2 to 4.5 are considered to comply with this requirement if the toy meets its appropriate requirements in 4.2 to 4.5;
- Materials with a piled surface which produce surface flash on the approach of a flame. Piled surfaces showing no momentary area of flame over the area of the piled surface remote from the test flame are considered to meet this requirement;
- Highly flammable solids.

In addition, toys shall not contain flammable gases, highly flammable liquids, flammable liquids, flammable gels except as provided for below:

- Flammable liquids, flammable gels and preparations supplied in sealed containers having a maximum volume of 15 ml per container;
- Highly flammable liquids and flammable liquids being entirely retained within a porous material in capillary channels of writing instruments;
- Flammable liquids with a viscosity greater than $260 \times 10^{-6} \text{m}^2/\text{s}$ corresponding to a flow time of more than 38 s when determined in accordance with EN ISO 2431 using cup No. 6;
- Highly flammable liquids contained in toys covered in EN 71-5.

NOTE: Different legal requirements may exist in non-EU countries.

4.3 These include for example cowboy suits, nurses outfits etc. and long flowing capes etc. not attached to headwear covered by 4.2.5.

If there is insufficient material to obtain a test sample of at least 610 mm x 100 mm, it is permissible to use a test sample made up of two separate pieces of material measuring 310 mm x 100 mm which - when fitted together with an overlap of 10 mm (see 5.4.1) - will constitute a test sample of 610 mm x 100 mm.

When tested in accordance with 5.4, the rate of spread of flame shall not exceed 30 mm/s or shall self-extinguish before the second marker thread is severed.

If the rate of spread of flame is between 10 mm/s and 30 mm/s, both the toy and the packaging shall be permanently marked with the following warning: "Warning! Keep away from fire".

Note:

- Photo is included.




TEST REPORT

NO.: A001T100710003001

Date: Jul 13, 2010

Page 3 of 3

Photograph of sample

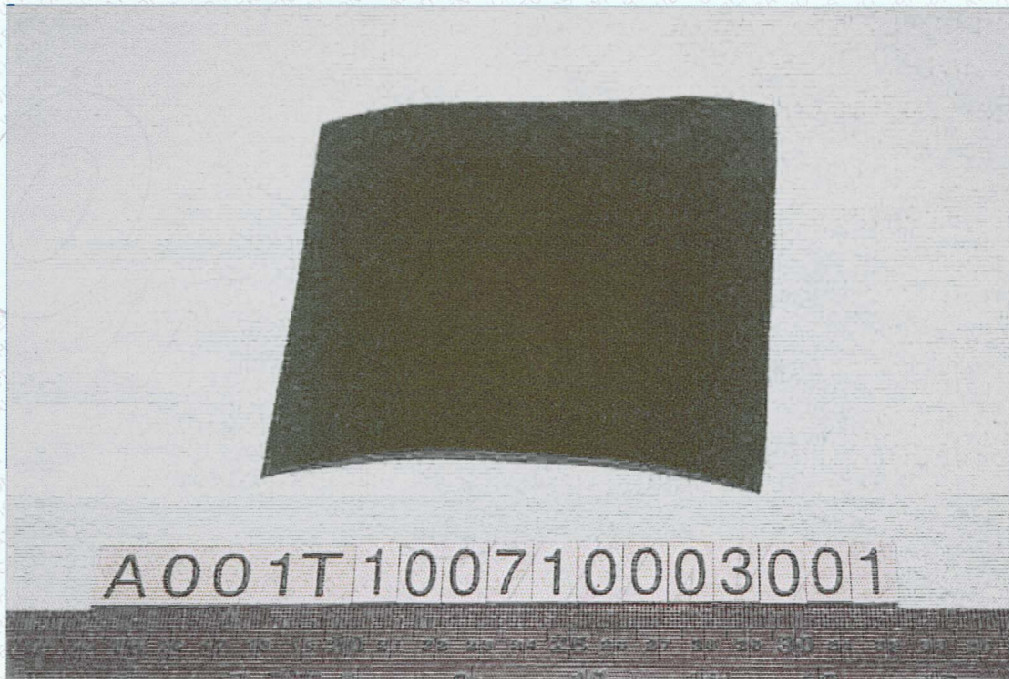

PVC TARPAULIN

End of Report